

PXD2-530-555W

182mm 10BB Double Glass PV Module


21.48%

MAXIMUM EFFICIENCY

0.45%

YEARLY DEGRADATION

PERC HALF CUT CELL

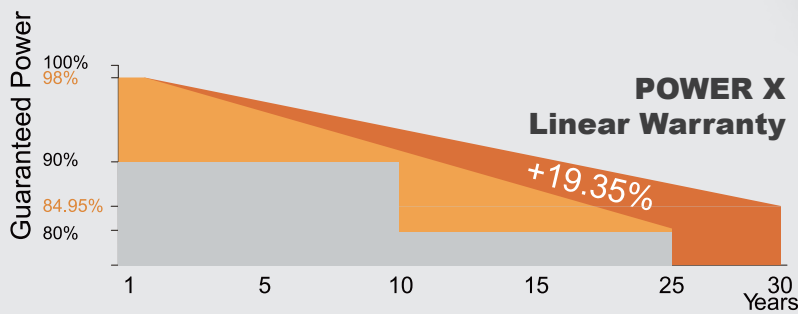

12 Years

MATERIAL & CRAFT
QUALITY ASSURANCE

30 Years

30 YEARS OUTPUT
GUARANTEE



Excellent Low-light Performance



Bifacial Technology up to 25% additional power gain from back side depending on albedo.



10BB technology reduce the distance between busbars and finger grid line which is benefit to power increase



High Density Packaging




Strengthened Mechanical Load



100% Inspection Guarantee Reliability


POWER X



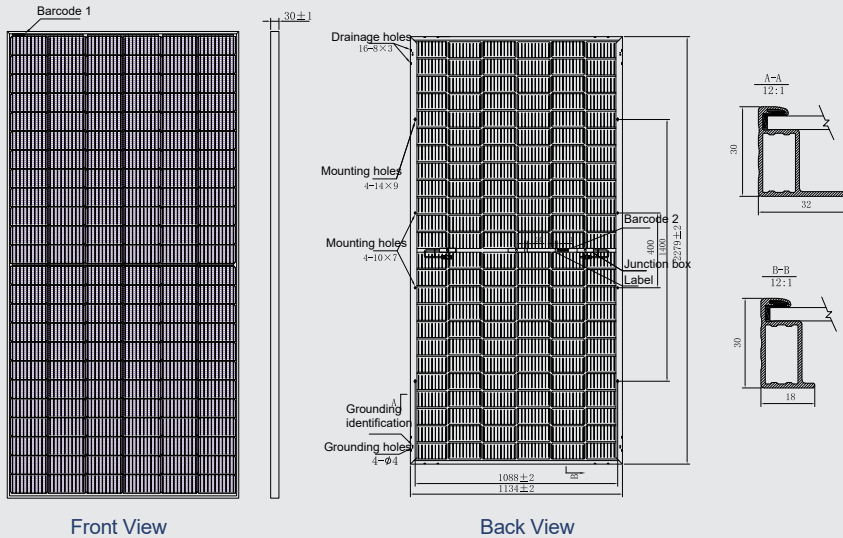


*Remark: customized frame color and cable length available upon request

I-V CURVES OF PV MODULE(530W)

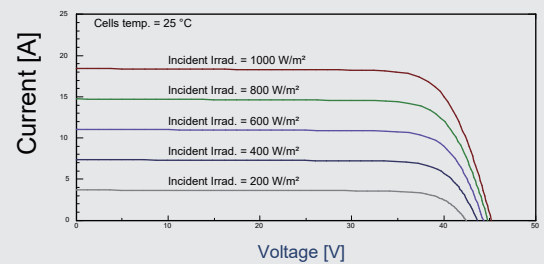

P-V CURVES OF PV MODULE(530W)

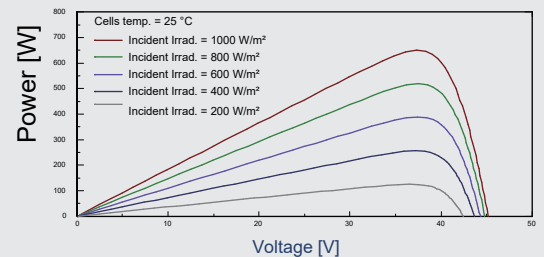

Electrical Characteristics (STC/NOCT)

Module Type	PXD2-530		PXD2-535		PXD2-540		PXD2-545		PXD2-550		PXD2-555	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	530	396.40	535	399.90	540	403.60	545	406.80	550	410.80	555	414.60
Voltage at Pmax -Vmp(V)	41.10	38.20	41.30	38.40	41.50	38.50	41.70	38.80	41.90	38.90	42.10	39.10
Current at Pmax - Imp(A)	12.91	10.38	12.96	10.42	13.02	10.47	13.07	10.49	13.13	10.56	13.19	10.61
Open Circuit Voltage - Voc(V)	49.40	46.20	49.60	46.30	49.80	46.50	50.00	46.70	50.20	46.90	50.40	47.10
Short- Circuit Current - Isc(A)	13.65	11.02	13.71	11.07	13.77	11.12	13.83	11.17	13.89	11.22	13.95	11.27
Module Efficiency - η m(%)	20.51	/	20.70	/	20.89	/	21.09	/	21.28	/	21.48	/
Power Tolerance(W)	(0, +4.99W)											
Maximum System Voltage(V)	1500Vdc (IEC / UL)											
Maximum Series Fuse Rating (A)	30 A											

STC : Irradiance 1000W/m², Module Temperature 25±2 °C, AM 1.5

NOCT : Irradiance 800W/m², Ambient Temperature 20 °C, AM 1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	2279×1134×30 mm (With Frame)
Weight	24.5±1.0 kg
Solar Cells	Mono crystalline 182mm (6×24)
Front Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction Box	IP 68, 3 diodes
Output Cables	4 mm ² , 350 mm (With Connectors)
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.35%/°C
Voc Temperature Coefficient	-0.29%/°C
Isc Temperature Coefficient	+0.05%/°C
Operating Temperature	-40 °C ~ +85 °C
Nominal Operating Cell Temperature(NOCT)	44 °C ±2 °C

Bifacial Output Real Side Power Gain

Front power Pmax/W	530	535	540	545	550	555
Total power Pmax/W	663	669	675	681	688	694
Vmp/V(Total)	41.20	41.40	41.60	41.80	42.00	42.20
Imp/A(Total)	16.08	16.15	16.23	16.30	16.37	16.44
Voc/V(Total)	49.50	49.70	49.90	50.10	50.30	50.50
Isc/A(Total)	17.02	17.10	17.17	17.25	17.32	17.39

Packing Configuration

2279×1134×30 mm (With Frame)	
Container	40'HQ
Pieces per Pallet	36
Pallets per Container	20
Pieces per Container	720